


## SWING CHECK VALVE THREAD END SOCKET WELD END

内螺纹旋启式止回阀

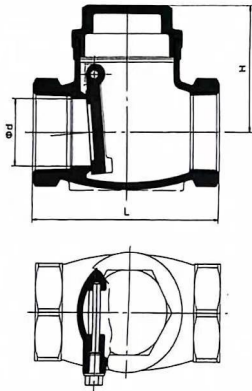

### 特点 Features

- 1/4"~3" (DN6~DN80)
- 工作压力 W.P.: 200WOG (PN16)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 旋启式阀瓣 Swing type disc
- 精密研磨 Precision grinding
- 螺纹连接标准 Thread end: ASME B1.20.1 (NPT),  
DIN 259 / DIN 2999, BS 21,  
ISO 288-1, ISO 7-1
- 承插焊连接标准 Socket weld end: ASME B16.11

### 尺寸 Dimensions

Unit: mm

尺寸 SIZE		d	L	H	D	J
1/4"	DN6	11	62	48	14.2	9.5
3/8"	DN10	11	62	48	17.6	9.5
1/2"	DN15	15	62	48	21.8	9.5
3/4"	DN20	20	75	52	27.2	12.5
1"	DN25	25	84	58	33.9	12.5
1-1/4"	DN32	32	102	70	42.7	12.5
1-1/2"	DN40	39	115	76	48.8	12.5
2"	DN50	50	135	82	61.2	16
2-1/2"	DN65	63	156	91.5	73.9	16
3"	DN80	76	188	102	89.8	16