


# GLOBE VALVE FLANGE END

## GB PN16/40

国标法兰截止阀

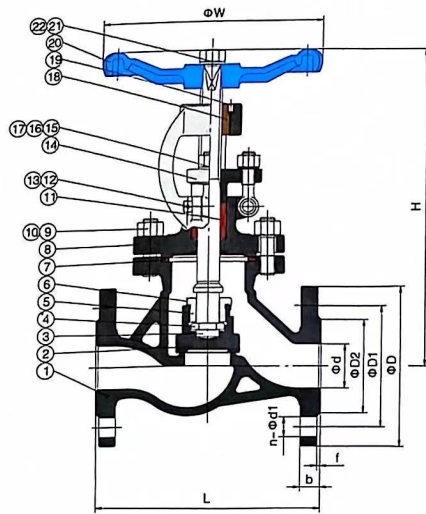

### 特点 Features

- 1/2'~12' (DN15~DN300)
- 工作压力 W.P.: 1/2'~2' PN40 2~1/2'~12' PN16
- 工作温度 W.T.: 425°C
- 升杆式/明杆 Rising stem
- 设计标准 Design: GB/T12235
- 法兰标准 Flange dimension: JB/T79-1994,GB/T9113.3
- 检验 & 测试 Inspection & testing: GB/T 12235

### 材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB+13Cr	CF8	CF8M
2	阀瓣 DISC	WCB+13Cr	CF8	CF8M
3	阀杆 STEM	20Cr13	304	316
4	OPEN RING	45	304	316
5	DISC NUT	35	304	316
6	THRUST WASHER	Q235A	304	316
7	垫片 GASKET	PTFE/304+GRAPHITE		
8	阀盖 BONNET	WCB	CF8	CF8M
9	螺栓 BOLT	35CrMo	304	304
10	螺母 NUT	45	304	304
11	填料 PACKING	PTFE/FLEXIBLE GRAPHITE		
12	CLEVIS PIN WITH HEAD	35	304	304
13	SPLIT PIN	Q235A	304	304
14	填料盖 GLAND	WCB	CF8	CF8
15	EYE BOLTS	35CrMo	304	304
16	平板 FLAT PAD	65Mn	304	304
17	螺母 NUT	45	304	304
18	阀杆螺母 阀杆螺母 STEM NUT	BRONZE		
19	SCREWS	35CrMo	304	304
20	手轮 HANDWHEEL	FCD/WCB		
21	平板 FLAT PAD	65Mn	304	304
22	螺母 NUT	45	304	304

### 尺寸 Dimensions PN16

Unit: mm

Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	W
15	130	15	45	65	95	14	2	4-14	178	120
20	150	20	55	75	105	14	2	4-14	182	140
25	160	25	65	85	115	14	2	4-14	201	140
32	180	32	78	100	135	16	2	4-18	238	160
40	200	40	85	110	145	16	3	4-18	249	160
50	230	50	100	125	160	16	3	4-18	263	200
65	290	65	120	145	180	18	3	4-18	312	200
80	310	80	135	160	195	20	3	8-18	336	250
100	350	100	155	180	215	20	3	8-18	388	300
125	400	125	185	210	250	22	3	8-18	467	350
150	480	150	210	240	285	22	3	8-22	529	400
200	600	200	265	295	340	24	3	12-22	667	450
250	730	250	320	355	405	26	3	12-26	825	500
300	850	300	375	410	460	28	3	12-26	947	600