


Y-STRAINER THREAD END SOCKET WELD END

Y型过滤器



特点 Features

- 1/4"~3" (DN6~DN80)
- 工作压力 W.P.: 80WOG (PN50)
- 工作温度 W.T.: -20°C~180°C
- 精密铸造 Investment casting
- 螺纹连接标准 Thread end: ASME B1.20.1 (NPT),
DIN 259 / DIN 2999, BS 21,
ISO 288-1, ISO 7-1
- 承插焊连接标准 Socket weld end: ASME B16.11

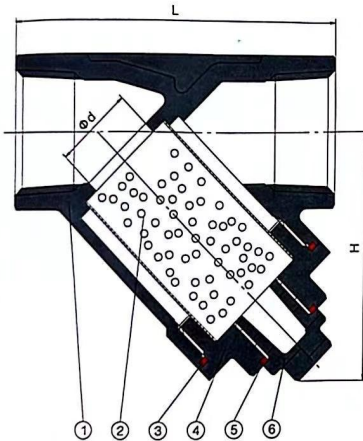


材料表 Material List

序号No.	零件 PARTS	材料 MATERIAL		
		WCB	CF8	CF8M
1	阀体 BODY	WCB	CF8	CF8M
2	SCREEN	304	304	316
3	垫片 GASKET	PTFE		
4	阀盖 BONNET	WCB	CF8	CF8M
5	垫片 GASKET	PTFE		
6	PLUG	WCB	CF8	CF8M

尺寸 Dimensions

Unit: mm



尺寸 SIZE		d	L	H	D	J
1/4"	DN6	11	65	45	14.2	9.5
3/8"	DN10	11	65	45	17.6	9.5
1/2"	DN15	15	65	45	21.8	9.5
3/4"	DN20	20	80	58.5	27.2	12.5
1"	DN25	22	90	66	33.9	12.5
1-1/4"	DN32	32	105	84.5	42.7	12.5
1-1/2"	DN40	39	120	87.5	48.8	12.5
2"	DN50	50	140	99.5	61.2	16
2-1/2"	DN65	63	170	113	73.9	16
3"	DN80	76	195	130	89.8	16